# ALUVISION
# Hi-LED 55
## PRODUCT OVERVIEW



## SPECIFICATION

### 2.5mm LED Videowall Solution ▼

Aluvision's Hi-LED 55 is a robust panel with a competetive pixel pitch. The panel consists of a full aluminium frame which boasts increased durability and structural fidelity.

| | |
|---|---|
| RESOLUTION | 192px x 192px |
| WEIGHT | 9.8 KG |
| MAX POWER DRAW | 101 W |
| BRIGHTNESS | 1,000 nits |
| INGRESS PROTECTION | IP 44 |
| OPTIMAL VIEW DISTANCE | 2.5m |
| PIXEL PITCH | 2.5mm |
| DIMENSIONS | 496mm x 496mm x 55mm |

## USE CASES

### CUBE ▼

All corners of the Hi-LED 55+ cabinets can be removed, allowing 5 panels to be combined to create a seamless cube arrangement.
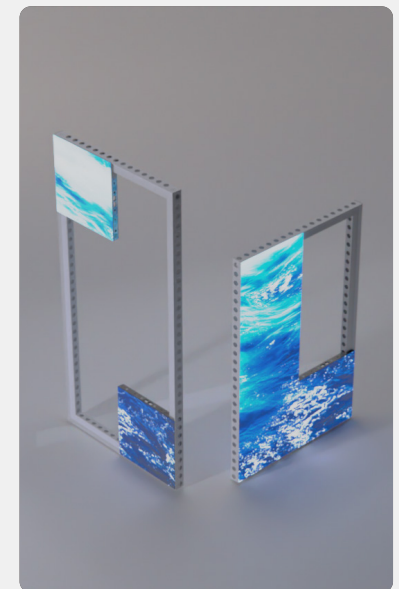


### WALKABLE TUNNEL ▼

By utilising Aluvision's modular rigging, panels can be arranged within a cylindrical housing to create an immersive walkable tunnel.



### MODULAR FRAME ▼

The modular frame allows panels to be place at varying intervals to create truly unique arrangements, all whilst reducing waste.



All measurements are in millimetres (mm) | Manifesto spec utilises rendered graphics which are illustrative and not 100% accurate

# CABINET DIMENSIONS

496.00

55.00

496.00

496.00



**XDBpixelhouse**